SCALE :- 1 : 100

PLAN OF PROPOSED RESIDENTIAL APARTMENT BUILDING (DISMANTLING THE EXISTING OLD BUILDING) AT SITE. NO. 42, KALIDASA ROAD, BLOCK - III, JAYALAKSHMIPURAM, DEVARAJA MOHALLA, MYSURU.

AREA DETAILS


SITE AREA : 3137.69 SQ MT
ROAD WIDENING AREA : 96.31 SQ MT
NET AREA : 3041.38 SQ MT

FLOORS	TOTAL GROSS AREA	SERVICE AREA				TOTAL SERVICE AREA	NET FLOOR AREA	NO. OF UNITS
		PARKING / TERRACE	CUT OUT	LIFT	STAIRCASE / RAMP			
BASEMENT 2	1109.74	1024.96	---	---	84.78	1109.74	--	--
BASEMENT 1	1109.74	1024.96	12.33	15.14	57.31	1109.74	--	--
GROUND FLOOR	404.81	130.96	18.75	15.14	69.88	234.73	170.08	--
1 ST FLOOR	407.01	--	14.94	15.14	27.59	57.67	349.34	1
2nd FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
3rd FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
4th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
5th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
6th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
7th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
8th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
9th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
10th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
11th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
12th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
13th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
14th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
15th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
16th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
17th FLOOR - REFUGE	442.65	--	20.03	15.14	51.08	86.25	356.40	2
18th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
19th FLOOR	447.60	146.48 (TERRACE)	11.09	15.14	27.59	200.30	247.30	--
TERRACE FLOOR	41.30	--	--	15.14	26.16	41.30	--	--
TOTAL	10796.29	2327.36	337.94	333.08	785.83	3784.21	7012.08	19

COVERAGE : $\frac{404.81}{3137.69}$ = 12.90 % < 60 % F.A.R. : $\frac{7012.08}{3137.69}$ = 2.235 < 2.25

SCHEDULE OF OPENINGS


SL.NO	CODE	TYPE	SIZE WIDTH	SIZE HEIGHT	SILL LEVEL FROM FFL/LINTEL	LOCATION
A	WOODEN DOOR					
01	W1	WOODEN DOOR	1200	2400	0	2400 ENTRY DOOR
02	W2	WOODEN DOOR	1200	2400	0	2400 LIFT LOBBY
03	W3	WOODEN DOOR	1000	2400	0	2400 BEDROOM
04	W4	WOODEN DOOR	900	2400	0	2400 MASTER BEDROOM TOILET
05	W4	WOODEN DOOR	900	2400	0	2400 MULTIUTILITY/STORAGE/MAIDS ROOM/UTILITY
B	SLIDING DOOR					
06	SD1	SLIDING DOOR	4950	2400	0	2400 BALCONY
07	SD1A	SLIDING DOOR	4530	2400	0	2400 BALCONY
08	SD2	SLIDING DOOR	4860	2400	0	2400 BALCONY
C	WINDOWS					
09	W1	SLIDING WINDOW	1200	1500	900	2400 STAIRCASE, LIFT LOBBY, POOJA, DRYING YARD, BEDROOM
10	W1A	SLIDING WINDOW	1200	2250	1050	3300 LIFT LOBBY - GROUND
11	W1B	SLIDING WINDOW	1800	1150	450	1600 STAIRCASE - GROUND
12	W2	SLIDING WINDOW	2025	1500	900	2400 LIFT LOBBY
13	W3	SLIDING WINDOW	3000	1500	900	2400 LIFT LOBBY
14	W4	SLIDING WINDOW	900	1500	900	2400 MAIDS ROOM
15	W5	SLIDING WINDOW	2850	1500	900	2400 BEDROOM, KITCHEN
16	W6	SLIDING WINDOW	2400	1950	450	2400 BEDROOM
17	W7	SLIDING WINDOW	2130	1500	900	2400 BEDROOM
18	W7	CASEMENT WINDOW	600	1500	900	2400 BEDROOM
19	W8	CASEMENT WINDOW	600	1500	900	2400 MAIDS ROOM
D	GLASS DOOR					
20	GD1	FIXED GLASS	1500	3600	0	3600 RECEPTION / WAITING
21	GD2	FIXED GLASS	2250	2800	600	3400 RECEPTION / WAITING
22	GD3	FIXED GLASS	10500	3600	600	4200 WAITING AREA
23	GD4	FIXED GLASS	4200	2800	600	3400 LIVING
24	GD4A	FIXED GLASS	4200	3000	0	3000 LIVING
25	GD4B	FIXED GLASS	3825	2400	0	2400 LIVING
26	GD5	FIXED GLASS	2850	2750	1050	3800 WAITING AREA
27	GD6	FIXED GLASS	2925	2350	600	2950 BUSINESS CENTER
28	GD7	FIXED GLASS	3300	2350	600	2950 BUSINESS CENTER
29	GD8	FIXED GLASS	2925	2350	600	2950 LIFT LOBBY
30	GD9	FIXED GLASS	2300	2350	600	2950 LIFT LOBBY
31	GD10	FIXED GLASS	6600	2400	0	2400 BASEMENT LOBBY
32	GD11	FIXED GLASS	9900	2400	0	2400 BASEMENT LOBBY
33	GD12	FIXED GLASS	2850	2400	0	2400 TERRACE
34	GD13	FIXED GLASS	1815	2400	0	2400 MPH
35	GD14	FIXED GLASS	6300	2400	0	2400 GYM
F	VENTILATORS					
36	V1	ALUMINIUM + FROSTED GLASS LOUVERS (OPERATABLE)	750	900	1500	2400 TOILET
G	LIFT DOOR					
37	LIFT	LIFT DOOR	1000*	2100*	0	2100* PASSENGER LIFT & SERVICE LIFT
H	SHAFT DOOR					
38	SD1	SERVICE SHAFT	900	1800	600	2400 SERVICE SHAFT
39	SD1A	SERVICE SHAFT	850	1800	600	2400 SERVICE SHAFT
40	SD2	SERVICE SHAFT	750	1800	600	2400 SERVICE SHAFT
41	SD3	SERVICE SHAFT	1200	1800	600	2400 SERVICE SHAFT
I	FIRE DOOR					
42	FD1	FIRE DOOR	1500	2400	0	2400 ELECTRICAL ROOM
J	METAL DOOR					
43	MD1	SERVICE DOOR	1200	2400	0	2400 STP
44	MD2	SERVICE DOOR	1500	2400	0	2400 PUMP ROOM



PARKING CALUCULATION DETAILS

CAR PARKING REQUIRED			
DESCRIPTION	NO. OF UNITS	PARKINGS REQUIRED	
NO. OF 4 BHK UNITS	17 NOS.	03 NOS. FOR 01 UNITS	51 NOS.
NO. OF 4 BHK UNITS	2 NOS.	01 NO. FOR 01 UNITS	2 NOS
VISITORS PARKING		10 % OF RESIDENTIAL PARKING	6 NOS.
CLUBHOUSE PARKING			9 NOS.
TOTAL NO. OF PARKINGS REQUIRED			68 NOS.

CAR PARKING PROVIDED	
LOWER BASEMENT	23
UPPER BASEMENT	19
GROUND FLOOR	26
TOTAL	68

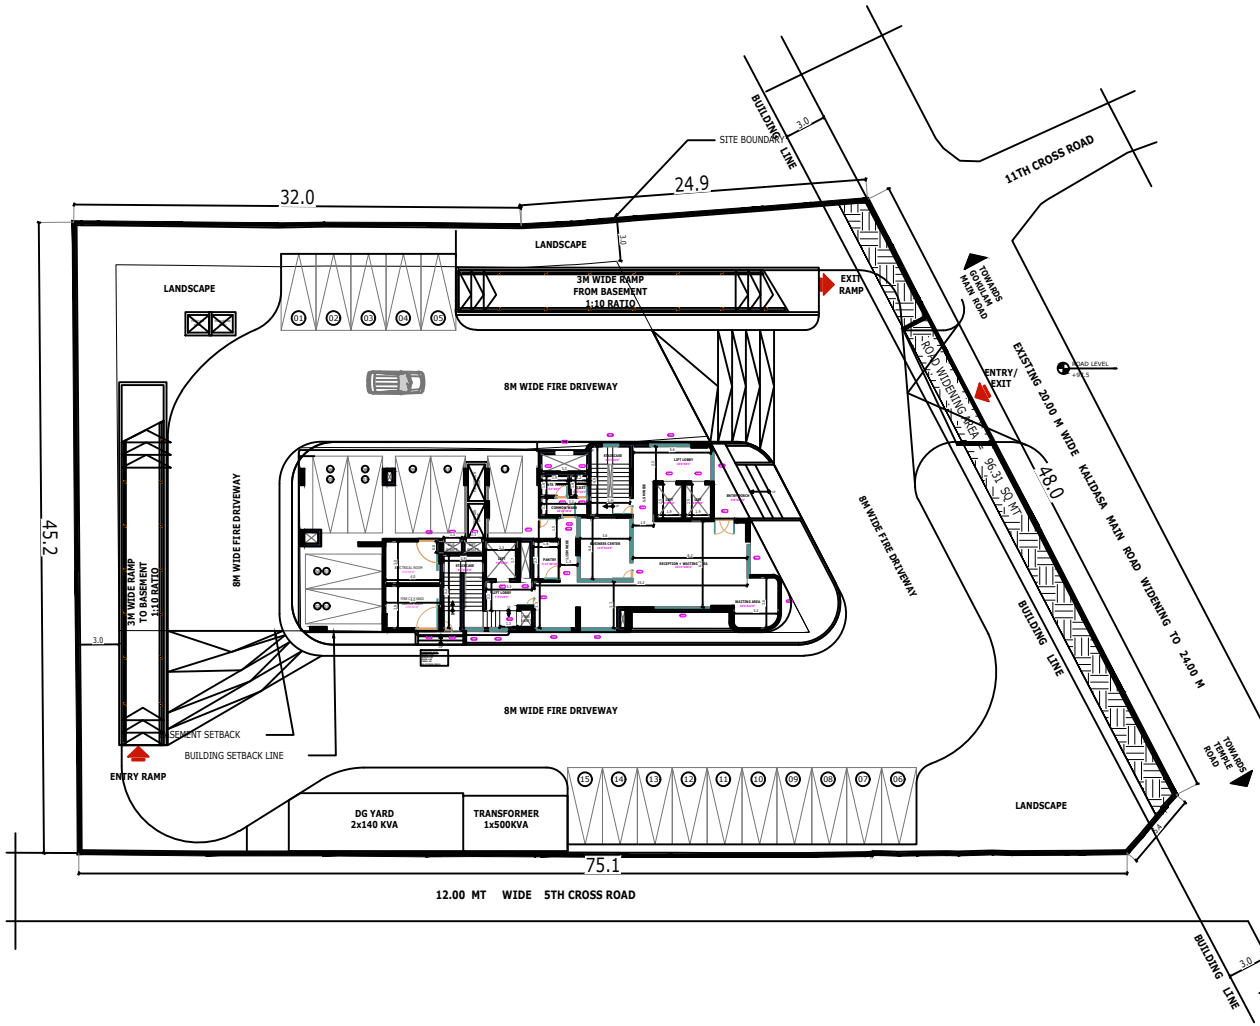

GROUND FLOOR PLAN

APPLICANT

ARCHITECT

URBAN FRAME

ANUP NAIK
(BCC/BL-3.2.3/A-1037/2002-03)
URBAN FRAME PVT LTD,
NO. 27/9, "SANKALPA", CUNNINGHAM ROAD,
VASANTH NAGAR | Bangalore-560 052 |

DRG. NO : DRG. NO : DWG / NS / 5692

ENGINEER

N. SRIDHARA B.E.,. (CIVIL).,.. F.I.V.,..
CHARTERED ENGINEER & APPROVED VALUER
M.C.C. LICENCE. NO : 10765 / 25 - 26.
Reg. No. CAT - 1, F - 16344
NO. 928, 8 TH MAIN ROAD,
GOKULAM 3 RD STAGE, MYSURU - 570 002.
MOBILE : 94484 91847, 96119 93157
E. Mail. : sudhakarplanner@gmail.com, bhuvanasalanke2711@gmail.com

MYS-LBPAS-32617/25-26/BP

Building Permit Application (MYS-LBPAS-32617/25-26/BP) submitted by MYSORE TOYS COMPANY REPRESENTED BY ITS PARTNER SATISH PRAPHULLA CHANDRA with Property ID 87276, Survey No. NIL

Owner(s)

1. MYSORE TOYS COMPANY REPRESENTED BY ITS PARTNER SATISH PRAPHULLA CHANDRA (PLAN OF PROPOSED RESIDENTIAL APARTMENT BUILDING AT SITE.NO.42, KALIDASA ROAD, 3RD BLOCK, JAYALAKSHMIPURAM, DEVARAJA MOHALLA, MSYURU.)

Land Details

1. Ward : 19 , Survey No. : NIL , Plot No. : 42 , Area : 3137.69 Sqm

Architect : Shridhara N (KBPAS-REG-11217/19-20)

Layout Approved By : (Mr Deepak P V [Asst. Town Planning Officer2-MYS]) @ 12/4/2025 12:00:00 PM

Approval Comments

Additional Comments

Drawing file forwarded for further Direction

*** End of approval comments ***

Digitally signed by SHAIKH TANVEER ASIF
Date: 2025.12.09 18:00:14 +05:30
Reason: Approved