PAGE 01 OF 06

SCALE :- 1 : 100

PLAN OF PROPOSED RESIDENTIAL APARTMENT BUILDING (DISMANTLING THE EXISTING OLD BUILDING) AT SITE. NO. 42, KALIDASA ROAD, BLOCK - III, JAYALAKSHMIPURAM, DEVARAJA MOHALLA, MYSURU.

AREA DETAILS

SITE AREA : 3137.69 SQ MT
ROAD WIDENING AREA : 96.31 SQ MT
NET AREA : 3041.38 SQ MT


FLOORS	TOTAL GROSS AREA	SERVICE AREA				TOTAL SERVICE AREA	NET FLOOR AREA	NO. OF UNITS
		PARKING / TERRACE	CUT OUT	LIFT	STAIRCASE / RAMP			
BASEMENT 2	1109.74	1024.96	---	---	84.78	1109.74	--	--
BASEMENT 1	1109.74	1024.96	12.33	15.14	57.31	1109.74	--	--
GROUND FLOOR	404.81	130.96	18.75	15.14	69.88	234.73	170.08	--
1 ST FLOOR	407.01	--	14.94	15.14	27.59	57.67	349.34	1
2nd FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
3rd FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
4th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
5th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
6th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
7th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
8th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
9th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
10th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
11th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
12th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
13th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
14th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
15th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
16th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
17th FLOOR - REFUGE	442.65	--	20.03	15.14	51.08	86.25	356.40	2
18th FLOOR	427.09	--	16.30	15.14	27.59	59.03	368.06	1
19th FLOOR	447.60	146.48 (OPEN TERRACE)	11.09	15.14	27.59	200.30	247.30	--
TERRACE FLOOR	41.30	--	--	15.14	26.16	41.30	--	--
TOTAL	10796.29	2327.36	337.94	333.08	785.83	3784.21	7012.08	19

COVERAGE : $\frac{404.81}{3137.69}$ = 12.90 % < 60 %

F.A.R. : $\frac{7012.08}{3137.69}$ = 2.235 < 2.25

SCHEDULE OF OPENINGS

SL.NO	CODE	TYPE	SIZE WIDTH	SIZE HEIGHT	SILL LEVEL	LINTEL	LOCATION
A	WOODEN DOOR						
01	WD	WOODEN DOOR	1050	2400	0	2400	ENTRY DOOR
02	D1	WOODEN DOOR	1350	2400	0	2400	LIFT LOBBY
03	D2	WOODEN DOOR	1000	2400	0	2400	BEDROOM
04	D3	WOODEN DOOR	900	2400	0	2400	MASTER BEDROOM TOILET
05	D4	WOODEN DOOR	800	2400	0	2400	TOILET/STAIRCASE/PASSG ROOM/TOILET
B	SLIDING DOOR						
06	SD1	SLIDING DOOR	2000	2400	0	2400	BALCONY
07	SD1A	SLIDING DOOR	1350	2400	0	2400	BALCONY
08	SD2	SLIDING DOOR	2000	2400	0	2400	BALCONY
C	WINDOWS						
09	W1	SLIDING WINDOW	1200	1500	900	2400	STAIRCASE, LIFT LOBBY, PASSA, DRYING YARD, BEDROOM
10	W1A	SLIDING WINDOW	1350	2350	1050	3400	LIFT LOBBY - GROUND
11	W1B	SLIDING WINDOW	1350	1150	450	1600	STAIRCASE - GROUND
12	W2	SLIDING WINDOW	1800	1500	900	2400	LIFT LOBBY
13	W3	SLIDING WINDOW	3000	1500	900	2400	LIFT LOBBY
14	W4	SLIDING WINDOW	900	1500	900	2400	SERVICE DUCT
15	W5	SLIDING WINDOW	2000	1500	900	2400	BEDROOM, KITCHEN
16	BW1	SLIDING WINDOW	2400	1950	450	2400	BEDROOM
17	W6	SLIDING WINDOW	2150	1500	900	2400	BEDROOM
18	W7	CASEMENT WINDOW	900	1500	900	2400	BEDROOM
19	W8	CASEMENT WINDOW	900	1500	900	2400	PASSG ROOM
D	GLASS DOOR						
20	G1	FIXED GLASS	1350	3400	0	3400	RECEPTION / WAITING
21	G1.2	FIXED GLASS	3150	2800	600	3400	RECEPTION / WAITING
22	G1.3	FIXED GLASS	10500	2800	600	3400	WAITING AREA
23	G1.4	FIXED GLASS	4100	2800	600	3400	LIVING
24	G1.4A	FIXED GLASS	4100	2400	0	2400	LISTED
25	G1.4B	FIXED GLASS	3000	2400	0	2400	LIVING
26	G1.5	FIXED GLASS	2350	2350	1050	3400	WAITING AREA
27	G1.6	FIXED GLASS	3825	2350	600	3400	BUSINESS CENTER
28	G1.7	FIXED GLASS	1300	2350	600	3400	BUSINESS CENTER
29	G1.8	FIXED GLASS	1300	2350	600	3400	LIFT LOBBY
30	G1.9	FIXED GLASS	2400	2350	600	3400	LIFT LOBBY
31	G1.10	FIXED GLASS	1400	2400	0	2400	DRIVEWAY LOBBY
32	G1.11	FIXED GLASS	3000	2400	0	2400	DRIVEWAY LOBBY
33	G1.12	FIXED GLASS	1350	2400	0	2400	TERRACE
34	G1.13	FIXED GLASS	1913	2400	0	2400	WAY
35	G1.14	FIXED GLASS	1000	2400	0	2400	WAY
E	VENTILATORS						
36	V1	LOUVRE(SR.+ FROSTED GLASS LOUVERS ARRANGE)	750	900	1500	2400	TOILET
F	LIFT DOOR						
37	LD*	LIFT DOOR	1000*	2100*	0	2100*	PASSENGER LIFT & SERVICE LIFT
G	START DOOR						
38	SR1	SERVICE SHAFT	800	1800	600	2400	SERVICE SHAFT
39	SR1A	SERVICE SHAFT	850	1800	600	2400	SERVICE SHAFT
40	SR2	SERVICE SHAFT	750	1800	600	2400	SERVICE SHAFT
41	SR3	SERVICE SHAFT	1350	1800	600	2400	SERVICE SHAFT
H	FIRE DOOR						
42	FD1	FIRE DOOR	1000	2400	0	2400	ELECTRICAL ROOM
I	METAL DOOR						
43	SR1	SERVICE DOOR	1200	2400	0	2400	STP
44	SR2	SERVICE DOOR	1350	2400	0	2400	PUMP ROOM




PARKING CALUCULATION DETAILS

CAR PARKING REQUIRED

DESCRIPTION	NO. OF UNITS	PARKINGS REQUIRED	
NO. OF 4 BHK UNITS	17 NOS	03 NOS. FOR 01 UNITS	51 NOS.
NO. OF 4 BHK UNITS	2 NOS	01 NO. FOR 01 UNITS	2 NOS
VISITORS PARKING		10 % OF RESIDENTIAL PARKING	6 NOS.
CLUBHOUSE PARKING			9 NOS.
TOTAL NO. OF PARKINGS REQUIRED			68 NOS.

CAR PARKING PROVIDED	
LOWER BASEMENT	23
UPPER BASEMENT	19
GROUND FLOOR	26
TOTAL	68

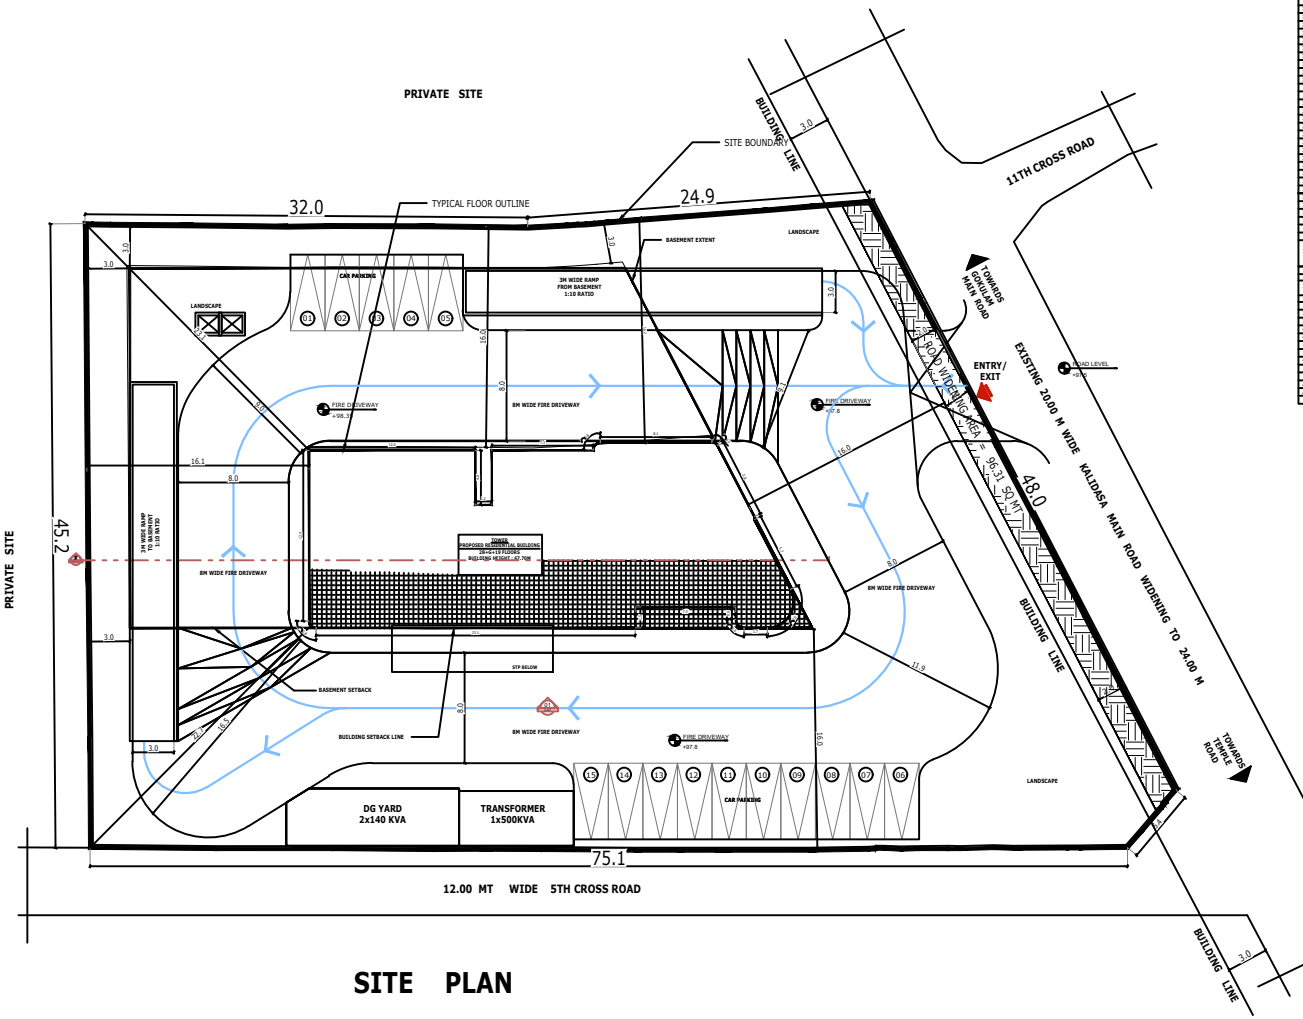

SITE PLAN

APPLICANT

ARCHITECT

URBAN FRAME

ANUP NAIK
(BCC/BL-3.2.3/A-1037/2002-03)
URBAN FRAME PVT LTD,
NO. 27/9, "SANKALPA", CUNNINGHAM ROAD,
VASANTH NAGAR | Bangalore-560 052 |

DRG. NO : DRG. NO : DWG / NS / 5692

ENGINEER

N. SRIDHARA B.E.,. (CIVIL).,.. F.I.V.,..
CHARTERED ENGINER & APPROVED VALUER
M.C.C. LICENCE. NO : 10765 / 25 - 26.
Reg. No. CAT - 1, F - 16344
NO. 928, 8 TH MAIN ROAD,
GOKULAM 3 RD STAGE, MYSURU - 570 002.
MOBILE : 94484 91847, 96119 93157
E. Mail. : sudhakarplanner@gmail.com, bhuvanasalanke2711@gmail.com

PAGE : 01 OF 06

MYS-LBPAS-32617/25-26/BP

Building Permit Application (MYS-LBPAS-32617/25-26/BP) submitted by MYSORE TOYS COMPANY REPRESENTED BY ITS PARTNER SATISH PRAPHULLA CHANDRA with Property ID 87276, Survey No. NIL

Owner(s)

1. MYSORE TOYS COMPANY REPRESENTED BY ITS PARTNER SATISH PRAPHULLA CHANDRA (PLAN OF PROPOSED RESIDENTIAL APARTMENT BUILDING AT SITE.NO.42, KALIDASA ROAD, 3RD BLOCK, JAYALAKSHMIPURAM, DEVARAJA MOHALLA, MSYURU.)

Land Details

1. Ward : 19 , Survey No. : NIL , Plot No. : 42 , Area : 3137.69 Sqm

Architect : Shridhara N (KBPAS-REG-11217/19-20)

Layout Approved By : (Mr Deepak P V [Asst. Town Planning Officer2-MYS]) @ 12/4/2025 11:58:09 AM

Approval Comments

Additional Comments

Drawing file forwarded for further Direction

*** End of approval comments ***

Digitally signed by SHAIKH TANVEER ASIF
Date: 2025.12.09 17:58:20 +05:30
Reason: Approved